

TRACKER

FOAM & STRAP
 + TIPGRIP TEMPLES
 + REMOVABLE ADJUSTABLE STRAP



TEMPLES
 + UPPER PROTECTION
 + INDIRECT VENTS
 + SIDE AERATION
 + FOAM REINFORCEMENT

LENS
 + PLATINUM[®] ASAF COATING
 + PANORAMIC FIELD OF VISION

VERSIONS



CLEAR
 #PSSTRAI064



SMOKE
 #PSSTRAI443



OPTICAL INSERT
 #SOSTRACKER



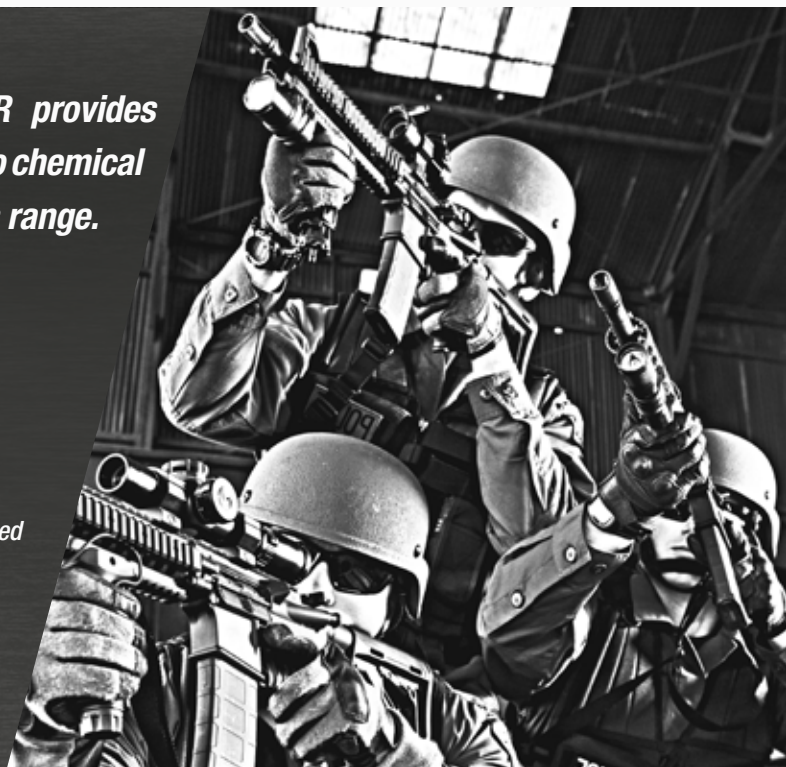
+ MICROFIBER POUCH INCLUDED

DESCRIPTION



Ultra-comfortable and technical TRACKER provides protection from all mechanical risks and also chemical risks making it unique in the safety glasses range.

TECHNOLOGIES

PLATINUM[®] (P) ASAF Coating
 Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM[®] resists to the most aggressive chemicals.



TRACKER

MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKING	FRAME MARKING	V50 RESISTANCE BALISTI STANAG 2920	ANSI/MIL	COATINGS
TRACKER	■ Grey/Black	● Clear	PSSTRAI064	2C-1.2 ☞ 1 BT KN C€	☞ EN166 3 4 BT C€	-	ANSI Z87.1	AS/AF 
	■ Grey/Black	● Smoke	PSSTRAI443	5-2.5 ☞ 1 BT KN C€	☞ EN166 3 4 BT C€	-	ANSI Z87.1	AS/AF 
	Optional	Optical insert	SOSTRACKER	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard ☞ Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard ☞ Manufacturer name

	PSSTRAI064	PSSTRAI443	PSSTRAIT10	SOSTRACKER
EAN13 Unit pack	3660740010874	3660740010881	3660740010898	3660740000028
EAN13 Inner pack (number of unit per inner pack)	3660740110871 (10 units)	3660740110888 (10 units)	3660740110895 (10 units)	-
Size // Weight Inner pack	24x18x9 cm 0.9 kg	24x18x9 cm 0.9 kg	24x18x9 cm 0.9 kg	-
EAN13 Carton (number of unit per master pack)	3660740210878 (180 units)	3660740210885 (180 units)	3660740210892 (180 units)	-
Size // Weight Master pack	75x52x31 cm 15.3 kg	75x52x31 cm 15.3 kg	75x52x31 cm 15.3 kg	-

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

TRACKER	
Lens	PC - 2.2 mm - Curve 8
Foam	EVA
Strap	Fabrics - 15mm
Temples	PC
Frame	PC
Spare lens	No
Country of origin	P.R.C



For more information on this product and the BSSI range, visit:

www.bollesafety-si.com

BOLLÉ SAFETY
34 rue de la Soie
69100, Villeurbanne
FRANCE