

2015 ICS EBB SYSTEM

Revival

ICS[®]
The Best Thing We Create



ICS-320
M4A1 EBB



ICS-321
M4 R.I.S. EBB



ICS-322
M4A1 Tubular R.A.S. L EBB



ICS-324
CXP-08 EBB



ICS-323
M4A1 Tubular R.A.S. S EBB



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: www.icsbb.com MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Revival

ICS[®]
The Best Thing We Create



ICS EBB System



Split Gearbox



One Piece Upper Receiver



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: WWW.ICSBB.COM MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Revival

ICS[®]
The Best Thing We Create

Receiver Locking Pins



Ambidextrous Charging Handle



Spring Release Function



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: WWW.ICSBB.COM MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Revival

ICS[®]
The Best Thing We Create



300 Round T-Mag (CXP08 Outfit)



450 Round M4 Metal Mag



Ergonomic Pistol Grip



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: www.icsbb.com MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Revival

ICS[®]
The Best Thing We Create

Adjustable Rubber Block System



Stock Tube Battery Housing



MTR Stock



Crane Stock



I CHIH SHIVAN ENTERPRISE CO., LTD


WEB: WWW.icsbb.com MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Reviva

ICS[®]
The Best Thing We Create

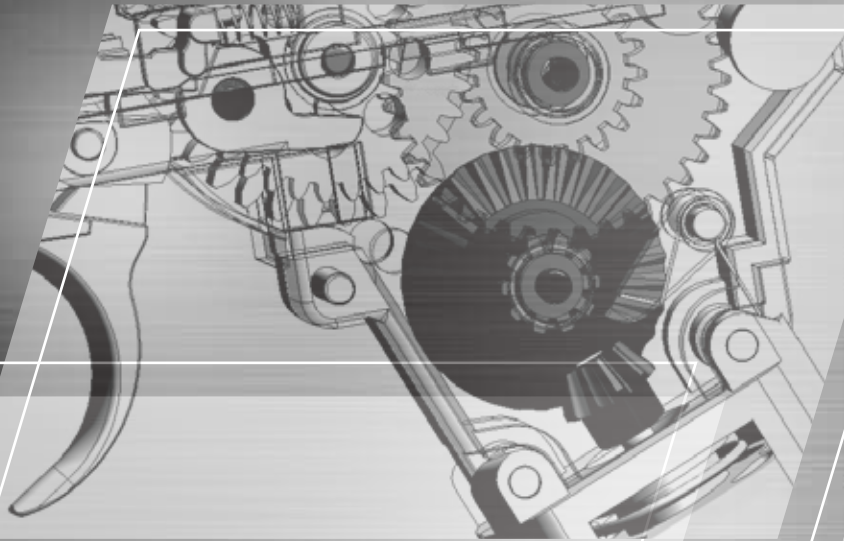

Reinforced MIM Pinion and Bevel Gear



Metal HOP UP Set



Upgraded Reinforced Piston



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: WWW.icsbb.com MAIL: ics@icsbb.com



2015 ICS EBB SYSTEM

Revival



EBB SYSTEM	ICS-320 M4A1 EBB	ICS-321 M4 R.I.S. EBB	ICS-322 M4A1 Tubular R.A.S. L EBB	ICS-323 M4A1 Tubular R.A.S. S EBB	ICS-324 CXP-08 EBB
Front Wired / Rear Wired	Front Wired	Rear Wired	Rear Wired	Rear Wired	Front Wired
Length (mm)	873 / 778	815 / 730	873 / 778	873 / 778	695 / 595
Gun Length (mm)	375	263	375	375	200
Muzzle Velocity	120 m/s (395fps)	120 m/s (395fps)	120 m/s (395fps)	120 m/s (395fps)	120 m/s (395fps)
Weight (g)	2900	3250	3000	2950	2900
Battery Type	Li-Po 11.1V 1000mAh	Li-Po 11.1V 1000mAh	Li-Po 11.1V 1000mAh	Li-Po 11.1V 1000mAh	Li-Po 11.1V 1000mAh
Mag. Capacity	450	450	450	450	300
Spring	M120	M120	M120	M120	M120
Material	Full Metal	Full Metal	Full Metal	Full Metal	Full Metal
Motor	Turbo 3000 long pin	Turbo 3000 long pin	Turbo 3000 long pin	Turbo 3000 long pin	Turbo 3000 long pin

1. Battery type is recommended, not included.
2. For AEG with M100 spring, it is recommended to use voltage 7.4V Li-Po or 9.6V Ni-Mh batteries only.
3. For different requirements and regulations in various markets and areas, the specifications may be revised on demand, and the specified AEG will be delivered.



I CHIH SHIVAN ENTERPRISE CO., LTD

WEB: www.icsbb.com MAIL: ics@icsbb.com

